

Energy Storage System Stacked Series









LFP 4.8-19.2 kWh

Tel: +86-553-8351618
Email: info@higonsolar.com
Web: www.higonsolar.com




1 SOC dynamic calibration

2 Accuracy of current & cell voltage acquisition

- | | |
|--|--|
| 
Reliable LFP Cells | 
Easy Installation & After Sales Service |
| 
Intelligent Build in BMS | 
Safety Protection and Easy Move |
| 
High Inverter Compatibility | 
Digital monitoring system APP |
| 
>6,000 Cycles at 90% DOD | 
Scalable up to 20-40kW(4 Parallel) |

PRODUCT FEATURES

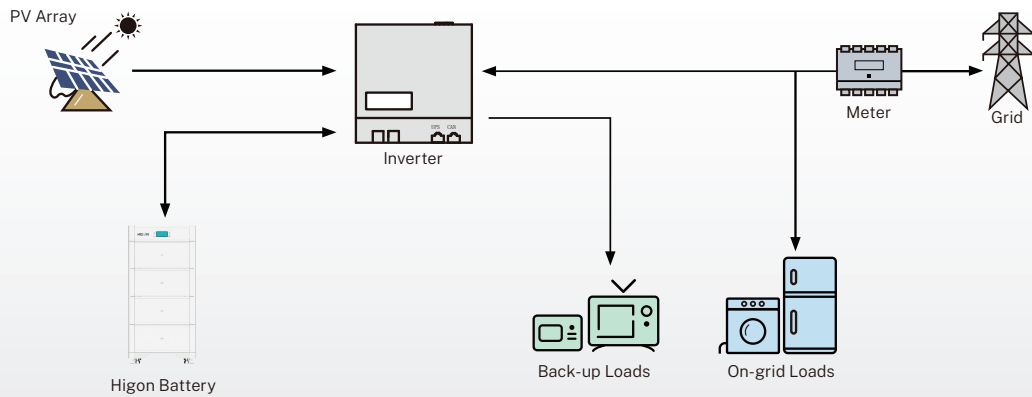

Product Type	LFP 4.8~19.2 kWh			
Technical Specifications				
Nominal Capacity	4.8kWh	9.6kWh	14.4kWh	19.2kWh
Size (L × W × H) (mm)	650x300x523	650x300x786	650x300x1049	650x300x1312
Weight	60.5kg	103.5kg	146.5kg	189.5kg
Maximum Usable Capacity	4.32kWh	8.64kWh	12.96kWh	17.28kWh
Rated Discharge/ Charge Current	60A	120A	180A	200A
Nominal Dis-/ Charge Power	2.8kW	5.6kW	8.4kW	9.6kW
Parallel Peak Power(Only Discharge)	4.8kW for 3s	9.6kW for 3s	14.4kW for 3s	16.0kW for 3s
Series Peak Power(Only Discharge)	4.8kW for 3s	9.6kW for 3s	14.4kW for 3s	16.0kW for 3s
Nominal Battery Operating Voltage(In Series)	45~52.5Vd.c	90~105Vd.c	135~175.5Vd.c	180~210Vd.c
Voltage(In parallel)	45~52.5Vd.c			
Nominal Battery Operating Voltage(In parallel)	48V			
Max. Battery Voltage	54V			
Max.recommended DOD	90%			
Operating Condition	Indoor or outdoor			
Discharge Temperature	From -10~55 °C			
Charge Temperature	From 0~50 °C			
WiFi Frequency Range	2400MHz~2483MHz			
Humidity	<95%(No condensed water)			
IP rating	IP 65			
Cooling Type	Natural cooling			
Case Material	Aluminium alloy			
Efficiency	≥96%			
Protective Class	I			
Max. Number of Series or Parallel	8S/8P			
Warranty	10 years			
Life Span	>15 years			
Communication	CAN/ RS485			
Battery Protection	Over-current/Over-voltage/Short circuit/ Under-voltage/Over temperature/Low temperature			
Hazardous Material classification	9			
Certifications	CE/UL 1973/IEC 62619/IEC62477/IEC 62040/MSDS/UN 38.3			